


Metal Roof Upgrade for Fasteners and Seams **RIVETGUARD™ AND SEAMGUARD™**

Leaking metal roof seams and fasteners are only the beginning of problems. Thermal movement with changing temperatures – expansion and contraction – works them loose. Winds and bad weather cause further destruction in a process that spells disaster, even premature roof replacement, unless addressed.

Now there's a solution. RivetGuard™ and SeamGuard™ –the first products specifically designed for metal roofs. They're the ultimate 100% man-made liquid, fibered rubber solution. Strong and elastic, they fill and form to any metal roof problems short of requiring retrofit panels and/or mechanical closure. So your roof adjusts as needed. Leaves no gaps. Locks fasteners firmly in place. Protects against rust and further failure at critical points, too.

What's more, RivetGuard™ and SeamGuard™ apply by sport bottle or spray direct to the area, making total protection easy. No wrinkles, risks, or big labor expense left behind by using tapes. When nature and old age come knocking on your metal roof, you have the ultimate solution with RivetGuard™ and SeamGuard™ from the TOPPS® lineup.

Sooner or later it happens. Protect your roof investment. Make RivetGuard™ and SeamGuard™ additions to your roof and reduce expenses. It's the economical way to return good roofs to like new performance with the seamless, durable seals of Topps®.

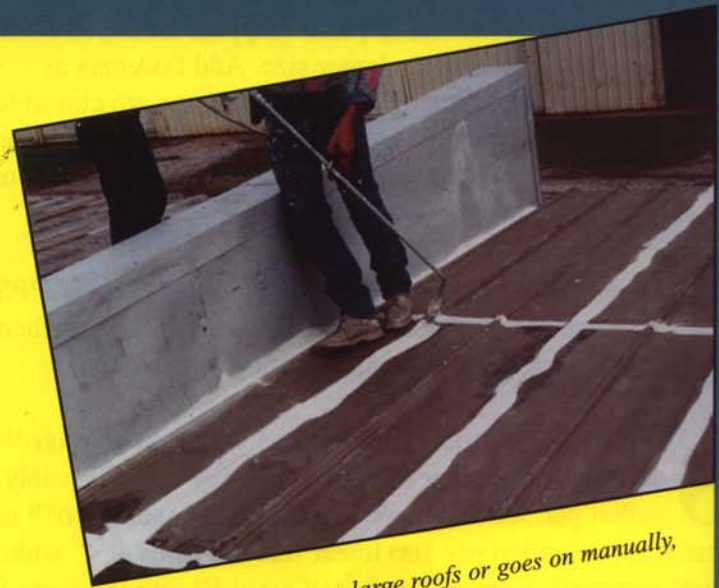

SeamGuard™ sprays on large roofs or goes on manually, making full roof protection practical.



RivetGuard™ applies easily and efficiently using a "sport" bottle. Because it is made to cling, RivetGuard makes a complete seal to both fastener and roof without slipping off.

- ◆ Accommodates normal roof movement
- ◆ No temporary tapes – no gaps!
- ◆ The durability of 100% rubber!
- ◆ Economical, easy application!

Protect your roof using RivetGuard™ and SeamGuard™ today and check into other fine TOPPS™ roof restoration products! You'll be glad you did!



TOPPS

MAINTENANCE SYSTEMS FOR A CHANGING WORLD

Topps Products, Inc. • 7200 W. 132nd St., Overland Park, KS 66213 USA
Tel: (913) 685-2500/1-800-867-7177 • Fax: (913) 851-9700 • e-mail: support@toppsproducts.com

Seal Important Roof Components with

RIVETGUARD™/SEAMGUARD™


1 Tighten all fasteners. Replace stripped, damaged or missing fasteners with slightly larger size. Add fasteners as necessary so all seams are flush and gaps are closed to no greater opening than 1/16". Apply POLYPRENE™ between metal pieces before tightening, if needed to prevent voids or create tighter seal.

2 Clean surface thoroughly. Wire brush or apply TOPPS® RUSTARRESTOR™ according to directions. The surface must be completely clean and dry during application.


3 Using plastic "sport" bottle filled with RIVETGUARD™ or dabbing mob, cover all fasteners using approximately one gallon per 300 fasteners. Pour/brush SEAMGUARD™ onto all seams at one gallon per 100 linear feet of seams at 4" wide (2 coats required), working the SEAMGUARD™ into the seam for added thickness where metal meets — or apply by airless spray. Repeat application to seams after 24 hours for best results.

4 Rubberize and corrosionproof, beautify and make your entire roof like new with ToppsSeal™ final finish.


Other Repairs: Critical areas can require special attention. These include reoccurring problems, vibrating exhaust fans, larger gaps or repairs on a steep slope etc. After following the procedure above, generously apply trowel grade POLYPRENE™ to the affected area and at least 3" beyond. Imbed pre-cut (to size) 6" POLYCORE™ polyester membrane into the wet cement, press firmly into place, and top with POLYPRENE™ to totally encapsulate.

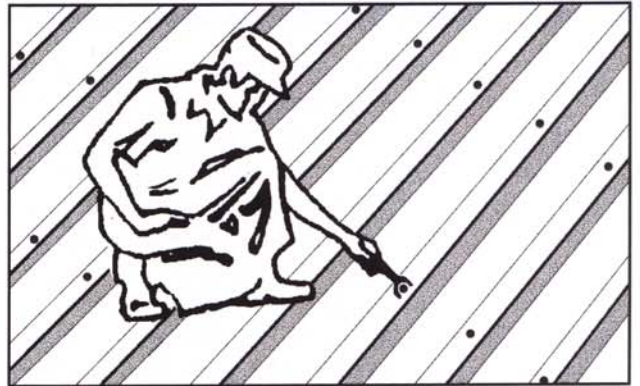

Tighten all fasteners, replacing missing or stripped ones with larger ones.

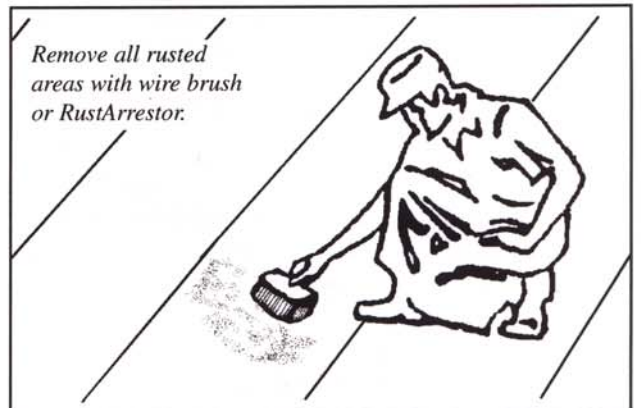


Remove all rusted areas with wire brush or RustArrestor.

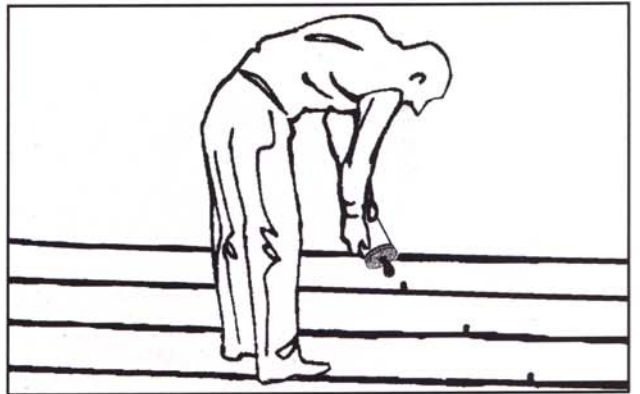

RivetGuard™ is easily applied to fasteners using a plastic "sport bottle" or caulk gun.

Although metal roof panels may differ in shape, all require fasteners — the source of many metal roof leaks.

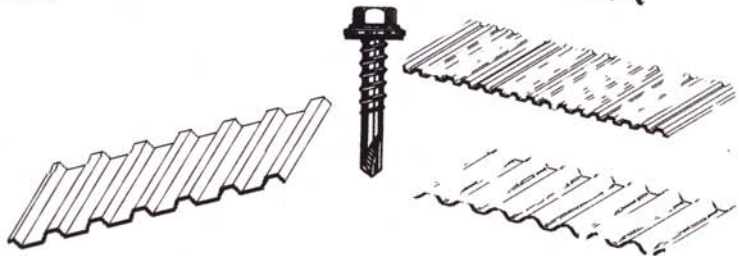

Independent Contractor: